




EVOBOND

**Cyanoacrylate Adhesives
Professional Specialist**

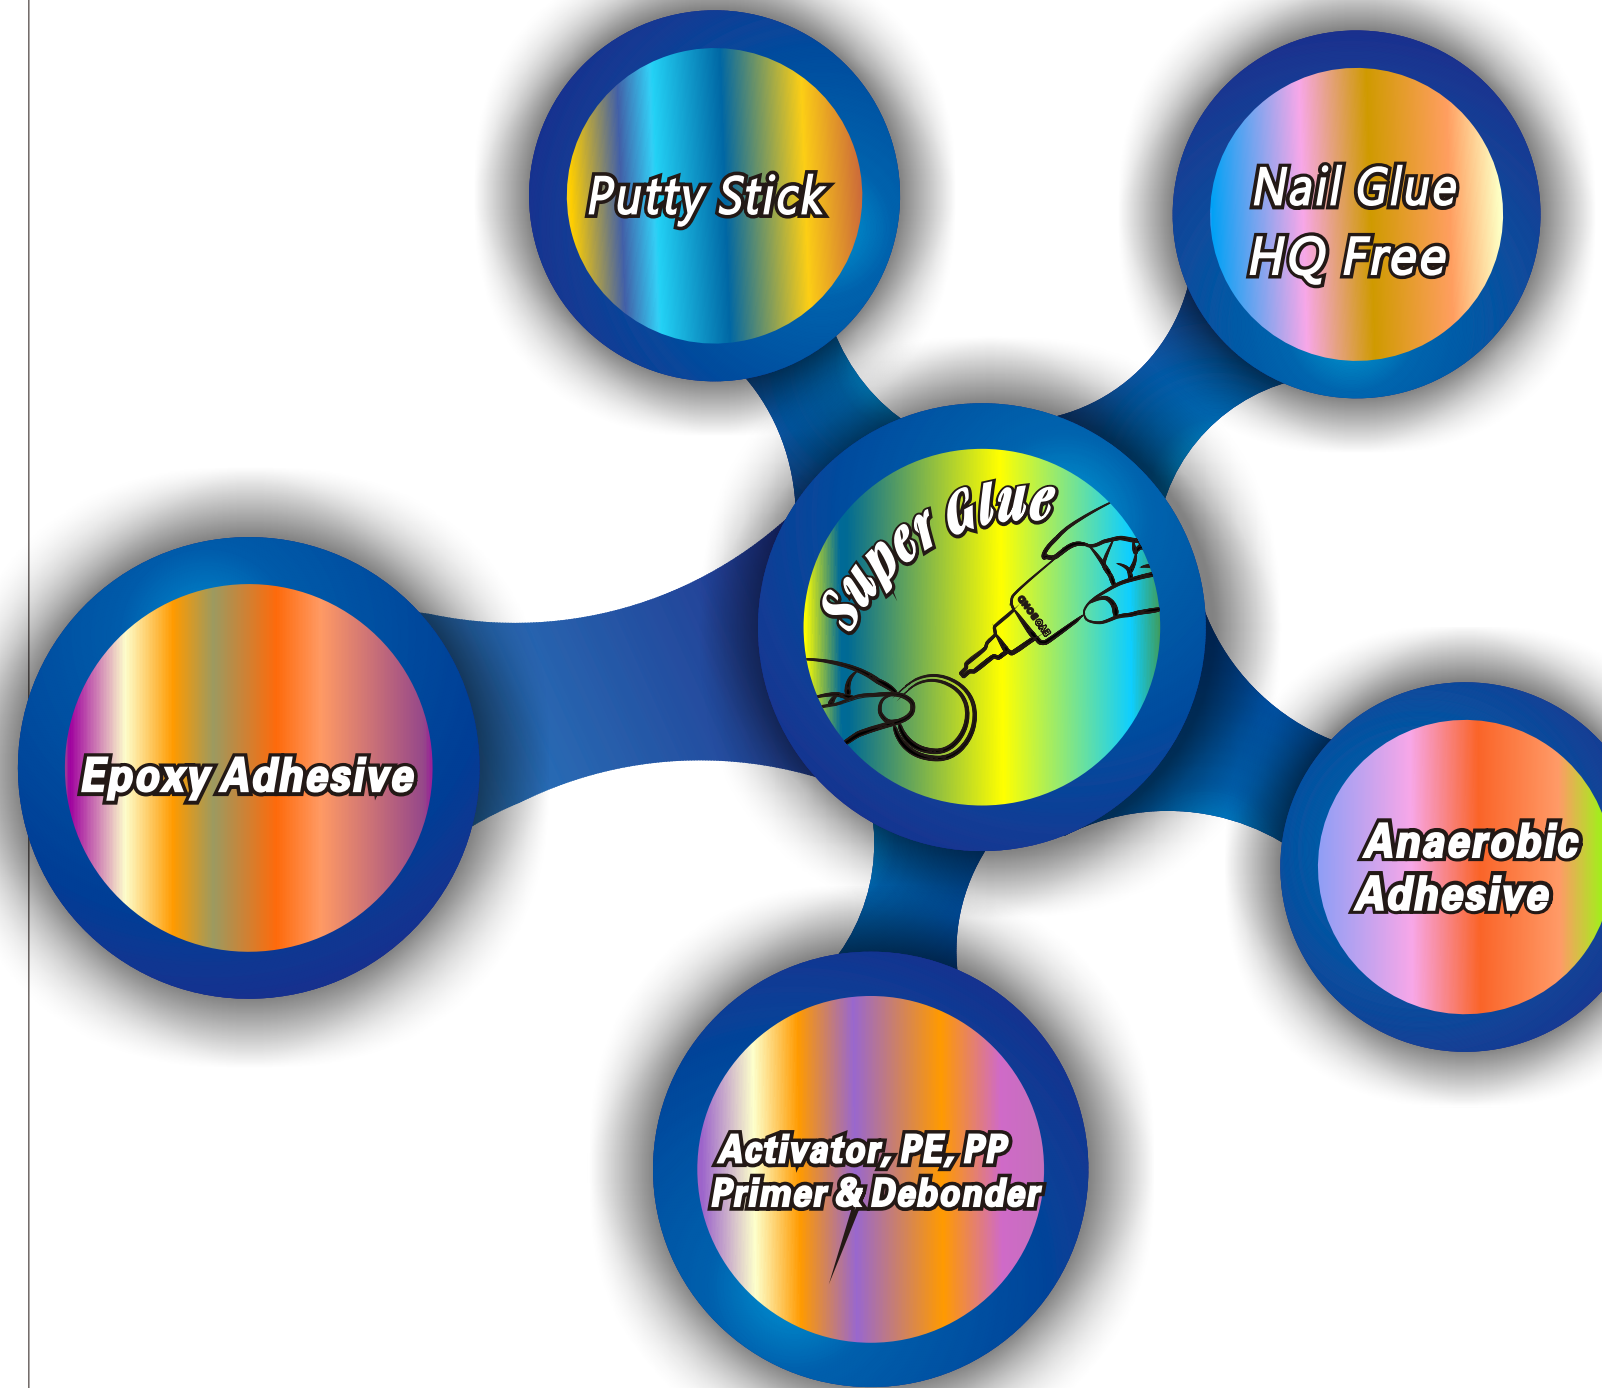

Our product was tested by SGS inspection organization authority and passed RoHS, Halogen, PFOA, PFOS, NP, PAHS, Phthalates (16P) and SVHC(REACH).

CYANOACRYLATE ADHESIVE

HIGH PERFORMANCE SERIES CYANOACRYLATE

EVOBOND High Performance Series Cyanoacrylate Adhesive is instant bonding single component adhesive that bonds almost all close-fitting smooth surfaces in seconds. EVOBOND THIXOTROPIC GEL is especially for vertical and porous surface application.



Grade	Chemical Type	Viscosity (CPS)	Gap Fill (mm)	Setting Velocity (Sec.)	Shelf life (Month)	Tensile-Shear Strength (kgf/cm ²)
W-20	ETHYL	2-3	0.04	5	6	100~160
W-50	ETHYL	2-3	0.04	10	12	120~200
W-70	ETHYL	2-3	0.04	15	14	120~200
V-50AL	ETHYL	50	0.06	20	14	120~200
GEL	ETHYL	GEL	1	30	12	120~220

*Temperature Range: -55~82° C

SPECIAL INDUSTRY SERIES CYANOACRYLATE

EVOBOND Special Industry Series cyanoacrylate is especially formulated for industry applications, including high performance, surface insensitive, and rubber toughness CA grades.



SURFACE INSENSITIVE SERIES

EVOBOND Industry series can be applied on wood, leather, rubber, cardboard, woven fabric and PVC materials.

Grade	Chemical Type	Viscosity (CPS)	Gap Fill (mm)	Setting Velocity (Sec.)	Shelf life (Month)	Tensile-Shear Strength (kgf/cm ²)
E401	ETHYL	100	0.10	10	8	100~160
E406	ETHYL	20	0.05	10	8	100~160
E420	ETHYL	2-3	0.04	10	12	120~200
E495	ETHYL	50	0.06	20	12	120~200
E416	ETHYL	1500	0.20	20	10	120~220

*Temperature Range: -55~82° C